
# Lighting



# IntelliBrite® 5g Color LED

### **Underwater LED Lights for Swimming Pools and Spas**



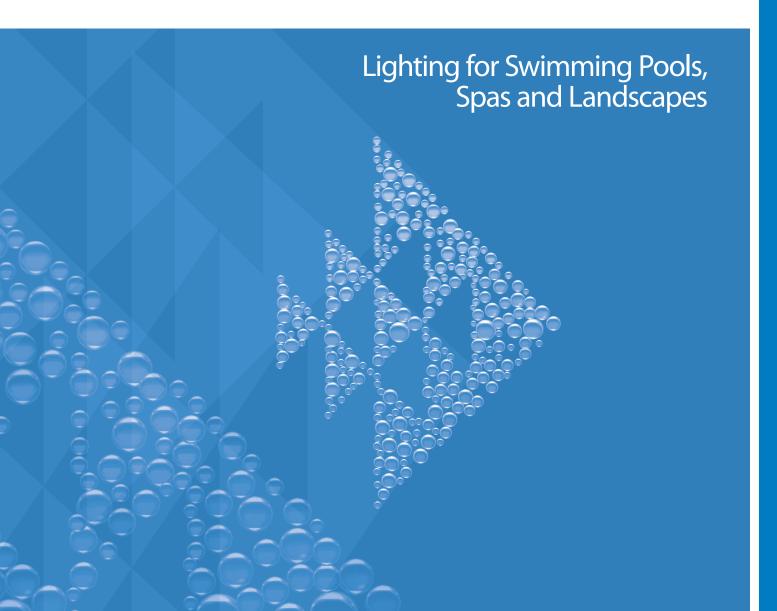



IntelliBrite 5g Color LED Pool and Spa Lights

IntelliBrite® automated color-changing pool and spa lights feature LED technology—the wave of the future in energy—efficiency, lifetime value, quality of light, and controllability. With IntelliBrite, combinations of individual colored LED's are mixed and matched to achieve a vibrant spectrum of colors. These combinations are power sequenced to illuminate and cycle through colors at varying speeds, and in different sequences of color. Combined with a custom reflector and unique lens design, IntelliBrite offers superb efficiency while being the brightest yet most energy efficient underwater LED light available.

### **Featured Highlights**

- A superior reflector design assures more light is directed toward the pool bottom to further increase intensity and color effects, while minimizing glare
- Superior lens geometry distributes light in an optimum way to avoid "hot spots" on the pool bottom. Light intensity and color are distributed more uniformly throughout your pool.
- Pool lens can be rotated to 180 degrees to provide wide beam pattern (standard) or narrow beam pattern
- IntelliBrite technology makes use of the brightest and most energy efficient LED's available in underwater pool and spa lights – up to 50% less energy consumption than competitor's lights
- Set one of 5 predetermined fixed colors to match or create the mood for the evening – blue, green, magenta, white, and red or select from 7 popular "color shows" that come preprogrammed into IntelliBrite
- IntelliBrite was designed to work with IntelliTouch® and EasyTouch®, the leading control systems for pool, spa, and poolscape equipment automation. In effect, you transfer control of IntelliBrite to the IntelliTouch® or EasyTouch® system which controls all your other backyard and pool features.
- IntelliBrite 5g Color Pool and Spa lights are backwards compatible with first generation IntelliBrite lights.

### **Ordering Information**

Voltage	Cord Length (Ft.)	Carton Qty.				
INTELLIBRITE 5g COLOR POOL LIGHTS (UL only)						
120	30	1				
120	50	1				
120	100	1				
120	150	1				
120	250	1				
12	30	1				
12	50	1				
12	100	1				
12	150	1				
	120 120 120 120 120 120 120 12 12	120 30 120 50 120 100 120 150 120 250 12 30 12 50 12 30 12 50 12 10 100				


Product	Voltage	Cord Length (Ft.)	Carton Qty.
INTELL	IBRITE 5g COLO	OR SPA LIGHTS (UL & C	SA)
640120	120	30	1
640121	120	50	1
640122	120	100	1
640123	120	150	1
640124	120	250	1
640130	12	30	1
640131	12	50	1
640132	12	100	1
640133	12	150	1


### **Dimensions and Certifications**





Please refer to page 118 for CSA listed IntelliBrite Pool Lights.





Note: All 120 volt pool and spa lights must be connected to a branch circuit protected by a ground fault circuit interrupter (GFCI).

# IntelliBrite® 5g White LED

# **Underwater LED Lights for Swimming Pools and Spas**

### **Featured Highlights**

- The brightest most energy efficient white LED pool light on the market
- Energy efficient utilizing up to 86% less energy than comparable incandescent lights
- Superior lens geometry and exclusive reflector design combine to create a wider beam and more uniform light distribution
- Pool lens can be rotated to 180 degrees to provide wide beam pattern (standard) or narrow beam pattern
- Compatible with Pentair Stainless steel and plastic niches
- Available in 120V and 12V versions
- Available in 300W, 400W, and 500W incandescent equivalencies





**Pentair Water** 

Pool and Spa®

IntelliBrite 5g White LED Pool Light

IntelliBrite® 5g White LED offers a brighter, more energy efficient alternative to incandescent white lighting. Utilizing its array of LEDs, it is also ideal for commercial applications.

### **Ordering Information for Pool Lights**

Product	Voltage	Cord Length (Ft.)	Incandescent Equivalency	Carton Qty.	Carton Wt. (Lbs.	
	INTELLIB	RITE 5g WHITE POOL LIGHT:	S – 300 WATT EQUIVALEN	T, 120 VOLT		
601100	120V	30 ft.	300W Equivalency	1		
601101	120V	50 ft.	300W Equivalency	1		
601102	120V	100 ft.	300W Equivalency	1		
601103	120V	150 ft.	300W Equivalency	1		
601104	120V	250 ft.	300W Equivalency	1		
INTELLIBRITE 5g WHITE POOL LIGHTS – 300 WATT EQUIVALENT, 12 VOLT						
601105	12V	30 ft.	300W Equivalency	1		
601106	12V	50 ft.	300W Equivalency	1		
601107	12V	100 ft.	300W Equivalency	1		
601108	12V	150 ft.	300W Equivalency	1		
	INTELLIB	RITE 5g WHITE POOL LIGHT	S – 400 WATT EQUIVALEN	T, 120 VOLT		
601200	120V	30 ft.	400W Equivalency	1		
601201	120V	50 ft.	400W Equivalency	1		
601202	120V	100 ft.	400W Equivalency	1		
601203	120V	150 ft.	400W Equivalency	1		
601204	120V	250 ft.	400W Equivalency	1		
	INTELLIE	BRITE 5g WHITE POOL LIGHT	S – 400 WATT EQUIVALEN	IT, 12 VOLT		
601205	12V	30 ft.	400W Equivalency	1		
601206	12V	50 ft.	400W Equivalency	1		
601207	12V	100 ft.	400W Equivalency	1		
601208	12V	150 ft.	400W Equivalency	1		
	INTELLIB	RITE 5g WHITE POOL LIGHT	S – 500 WATT EQUIVALEN	T, 120 VOLT		
601300	120V	30 ft.	500W Equivalency	1		
601301	120V	50 ft.	500W Equivalency	1		
601302	120V	100 ft.	500W Equivalency	1		
601303	120V	150 ft.	500W Equivalency	1		
601304	120V	250 ft.	500W Equivalency	1		
	INTELLIE	BRITE 5g WHITE POOL LIGHT	S – 500 WATT EQUIVALEN	IT, 12 VOLT		
601305	12V	30 ft.	500W Equivalency	1		
601306	12V	50 ft.	500W Equivalency	1		
601307	12V	100 ft.	500W Equivalency	1		
601308	12V	150 ft.	500W Equivalency	1		



# IntelliBrite<sup>®</sup> 5g White LED (Cont'd)

# **Underwater LED Lights for Swimming Pools and Spas**


### **Ordering Information for Spa Lights**

Product	Voltage	Cord Length (Ft.)	Incandescent Equivalency	Carton Qty.	Carton Wt. (Lbs.)
		INTELLIBRITE 5g WHITE	SPA LIGHTS - 120 VOL	Г	
640140	120V	30 ft.	100W Equivalency	1	6.5
640141	120V	50 ft.	100W Equivalency	1	8
640142	120V	100 ft.	100W Equivalency	1	12
640143	120V	150 ft.	100W Equivalency	1	16
640144	120V	250 ft.	100W Equivalency	1	25
		INTELLIBRITE 5g WHITI	E SPA LIGHTS - 12 VOLT		
640150	12V	30 ft.	100W Equivalency	1	5.5
640151	12V	50 ft.	100W Equivalency	1	7
640152	12V	100 ft.	100W Equivalency	1	11
640153	12V	150 ft.	100W Equivalency	1	18

### **Dimensions and Certifications**




STED



IntelliBrite White Pool Dimensions

Note: All 120 volt pool and spa lights must be connected to a branch circuit protected by a ground fault circuit interrupter (GFCI).



IntelliBrite White Spa Dimensions

# **IntelliBrite® Landscape Lights**

### **Color LED Lights for Landscapes**

### **Featured Highlights**

- · Ability to Synchronize with IntelliBrite Color Pool and Spa Lights
- Can be controlled by IntelliTouch® and EasyTouch® Systems
- Utilizes Energy Efficient LED technology
- 2 levels of Brightness and color saturation
- 2 suites of colors ("Landscape and IntelliBrite")
- · 40° beam width

IntelliBrite Landscape Lights, with 5 fixed colors and 7 shows, are compatible with IntelliBrite Pool and Spa Lights, and can be controlled by IntelliTouch, EasyTouch and IntelliBrite Controllers. These lights can be mounted in any position on the wall or ground with an arm swing of 0° to 90°.




IntelliBrite Landscape Lights

### **Ordering Information**

rton (Lbs.)	Carton Qty.	Wattage	Voltage	Product			
INTELLIBRITE LANDSCAPE LIGHTS							
2.5	1	15	12V	690019			
	RECOMMENDED LANDSCAPE LIGHT TRANSFORMERS						
10	1	100	12V-14V	619962			
17	1	300	12V-14V	619963			
	TRANSFORMERS  1	100	12V-14V	619962			

See page 431 for replacement parts.

### **Dimensions and Certifications**



# IntelliBrite® Controller

### Featured Highlights

- Waterproof Outdoor LED Color Light Controller
- · Quick access to all colors and shows
- · Convenient hold and recall function
- · Fits in 22.5 cu. in. single gang box or larger
- Illuminated power button





### IntelliBrite Controller


IntelliBrite® Controller works with IntelliBrite Color Pool and Spa LED lights as well as IntelliBrite Landscape Lights. It can control and synchronize both sets of lights to create dazzling shows.

### **Ordering Information**

Product	Description	Carton Qty.	Carton Wt. (Lbs.)				
	INTELLIBRITE POOL LIGHTS						
600054	IntelliBrite Controller	1	1				

# **Dimensions and Certifications**





# **Amerlite**<sup>®</sup>

# **Underwater Incandescent Lights with S/S Face Rings**





Amerlite Incandescent Lights

Amerlite®, the world standard of reliability for underwater lights, features a stainless steel shell, 8-3/8 in. prismatic tempered glass lens, and stainless steel face ring with uni-tension clamp. Amerlite lights are UL listed to install in full-sized Pentair Pool Products, American, PacFab and Purex niches.

### **Featured Highlights**

- · World standard of reliability
- Stainless steel face ring with uni-tension clamp
- Superior light diffusion
- Prismatic tempered lens
- · Gold diffused low water cutoff
- · Medium blue lenses available
- Plastic snap-on face rings available for s/s lights

Product	Voltage	Wattage	Cord Length (Ft.)	Carton Qty.	Carton Wt. (Lbs.)	
	AMERLITE V	VITH STAINLESS STE	EL FACE RING – 300 WATT	, 120 VOLT		
78421100	120	300	15	1	6	
78428100	120	300	50	1	10	
78928500	120	300	100	1	15	
78927000	120	300	150	1	20	
78927900	120	300	200	1	25	
	AMERLITE V	VITH STAINLESS STE	EL FACE RING – 400 WATT	, 120 VOLT		
78441100	120	400	15	1	6	
78448100	120	400	50	1	10	
78949100	120	400	100	1	15	
78447100	120	400	150	1	20	
78449100	120	400	200	1	25	
	AMERLITE V	VITH STAINLESS STE	EL FACE RING – 500 WATT	, 120 VOLT		
78451100	120	500	15	1	6	
78458100	120	500	50	1	10	
78456300	120	500	100	1	15	
78457100	120	500	150	1	20	
78459100	120	500	200	1	25	
78458300	120	500	250	1	35	
	AMERLITE WITH STAINLESS STEEL FACE RING – 100 WATT, 12 VOLT					
78411100	12	100	15	1	6	
78418100	12	100	50	1	10	
78415100	12	100	100	1	15	

# **Amerlite**<sup>®</sup> (Cont'd)

# **Underwater Incandescent Lights with S/S Face Rings**

Product	Voltage	Wattage	Cord Length (Ft.)	Carton Qty.	Carton Wt. (Lbs.)	
AMERLITE WITH STAINLESS STEEL FACE RING – 300 WATT, 12 VOLT						
78431100	12	300	15	1	10	
78438100	12	300	50	1	17	
78435100	12	300	100	1	20	
	STAINLESS STEEL AM	ERLITE WITH N	MEDIUM BLUE LENS – 400 V	VATT, 120 VOLT		
78444200	120	400	30	1	8	
78448200	120	400	50	1	10	
78950100	120	400	100	1	15	
STAINLESS STEEL AMERLITE WITH MEDIUM BLUE LENS – 500 WATT, 120 VOLT						
78454200	120	500	30	1	8	
78458200	120	500	50	1	10	
78958500	120	500	100	1	15	
	LENS,	COVERS, AND I	FACE RINGS FOR AMERLITE			
79100100	Clear Lens, tempered			1	1	
79100200	Medium Blue Lens, tempere	d		1	1/2	
78900100	Plastic Snap-on Color Lens K	it (Blue, Green, F	Red)	1	1	
79110600	Stainless Steel Face Ring	Stainless Steel Face Ring			1/2	
79213100	Plastic Snap-on face ring (white), Qty. 24			24	2	
79212100	Plastic Snap-on face ring (White) Qty. 1			1	1/2	
79212165	Plastic Snap-on face ring (Gr	ey) Qty. 1		1	1/2	
79212111	Plastic Snap-on face ring (Bla	ack) Qty. 1		1	1/2	

Please refer to page 118 for CSA listed IntelliBrite Pool Lights.


### **Dimensions and Certifications**





Note: All 120 volt pool and spa lights must be connected to a branch circuit protected by a ground fault circuit interrupter (GFCI).

Note: All cord lengths over 50 feet on 12 volt lights create resistance that dramatically reduces the light output. This condition exists on all low voltage lights regardless of design or manufacturer.



# **SpaBrite**®

# **Incandescent Lights for Swimming Pools and Spas**





SpaBrite Incandescent Lights

SpaBrite® lights are available with stainless steel face rings. These lights are perfect for spas and areas where space is not available for a full-size light. SpaBrite lights install in small plastic or stainless steel Pentair niches.

### **Featured Highlights**

- · Stainless steel face rings
- Prismatic tempered glass lens
- · Stainless steel housing
- · Easy service stainless steel clamp
- Incandescent 12v and Halogen 120v lamp
- · Gold diffused low water cutoff
- Easy to service
- Plastic snap-on colored face ring covers available

### **Ordering Information**

Product	Voltage	Wattage	Cord Length (Ft.)	Carton Qty.	Carton Wt. (Lbs.)	
SPABRITE HALOGEN LIGHTS WITH STAINLESS STEEL FACE RING – 120 VOLT						
78106000	120	60W (100W equivalency)	30	1	7	
78106100	120	60W (100W equivalency)	50	1	9	
78106200	120	60W (100W equivalency)	100	1	14	
78106300	120	60W (100W equivalency)	150	1	19	
78106400	120	60W (100W equivalency)	200	1	24	
SPABRITE LIGHTS WITH STAINLESS STEEL FACE RING – 12 VOLT						
78101200	12	100W	15	1	6	
78108200	12	100W	50	1	9	
78107500	12	100W	100	1	14	
		ACCE	SSORIES			
79212200	Snap-on face rir	ng, plastic, white		1	1/2	
79212211	Snap-on face rir	ng plastic, black		1	1/2	
79212265	Snap-on face rir	ng, plastic, grey		1	1/2	
79108900	Snap-on color le	ens plastic, red		1	1/2	
79109000	Snap-on color le	ens plastic, blue		1	1/2	
650019	Snap-on color le	ens kit (magenta, purple, teal, gr	reen)	1	2	

Please refer to page 118 for CSA listed IntelliBrite Pool Lights.


### **Dimensions and Certifications**





Please refer to page 118 for CSA listed SpaBrite Pool Lights.





Note: All 120 volt pool and spa lights must be connected to a branch circuit protected by a ground fault circuit interrupter (GFCI).

Note: All cord lengths over 50 feet on 12 volt lights create resistance that dramatically reduces the light output. This condition exists on all low voltage lights regardless of design or manufacturer.

# **AquaLight®**

# **Halogen Quartz Lights with Stainless Steel Face Ring**



### **Featured Highlights**

- Prismatic tempered glass lens
- · Stainless steel housing
- Easy service stainless steel clamp
- · Halogen-quartz lamp
- Gold diffused low water cutoff
- · Easy to service
- Plastic snap-on face rings and colored lenses available

The AquaLight® uses halogen quartz bulbs and designed for installation in small plastic or stainless steel Pentair niches. The light shell is high-quality stainless steel and the lens is Prismatic tempered glass.



AquaLight Halogen Lights

### **Ordering Information**

Product	Voltage	Wattage	Cord Length (Ft.)	Carton Qty.	Carton Wt. (Lbs.)			
	AQUALIGHT LIGHTS – 100 WATT, 120 VOLT							
77111100	120	100	15	1	6			
77118100	120	100	50	1	9			
77310100	120	100	100	1	14			
		AQUALIGHT LIGHT	S – 250 WATT, 120 VOLT					
77161100	120	250	15	1	6			
77168100	120	250	50	1	9			
77360300	120	250	100	1	14			
77365000	120	250	150	1	19			
77362000	120	250	200	1	24			
	AQUALIGHT LIGHTS – 75 WATT, 12 VOLT							
77181100	12	75	15	1	6			
77188100	12	75	50	1	9			
77182500	12	75	100	1	12			
		ACCE	ESSORIES					
79212200	O Snap-on face ring, plastic, white			1	.5			
79212211	Snap-on face ring plastic, black			1	.5			
79212265	Snap-on face ring, plastic, grey			1	.5			
79108900	Snap-on color lens plastic, red			1	.5			
79109000	Snap-on color lens plast	ic, blue		1	.5			
650019	Snap-on color lens kit (n	nagenta, purple, teal,	green)	1	2			


Please refer to page 118 for CSA listed IntelliBrite Pool Lights.

Note: All 120 volt pool and spa lights must be connected to a branch circuit protected by a ground fault circuit interrupter (GFCI).

Note: All cord lengths over 50 feet on 12 volt lights create resistance that dramatically reduces the light output. This condition exists on all low voltage lights regardless of design or manufacturer.

Notice: Underwriters Laboratories has listed Pentair Pool Products lights for use with Pentair Pool Products, American Products, Purex, or PacFab niches only. To ensure proper grounding/bonding connections install only Pentair Pool Products lights in Pentair Pool Products, American Products, Purex, or PacFab niches.

# **Dimensions and Certifications**







Please refer to page 118 for CSA listed AquaLight Pool Lights.

# **AquaLumin**<sup>®</sup> III Lights

# **Nicheless Light for Swimming Pools and Spas**

The AquaLumin® III nicheless lights provide brilliant, double contact halogen quartz





lighting for all vinyl liner pools and spas.
This revolutionary design uses a mounting hub and bracket instead of a niche. This light eliminates the need for pre-punched light panels, costly make-up panels and extra braces for vinyl pools.

### **Featured Highlights**

- Requires only a 3 in. hole in wall panel
- No costly make-up panels
- · No extra braces
- · Wall hugging fit
- · Easy to service
- · Easy to install

# Ordering Information

AquaLumin III Nicheless Light


Product	Voltage	Wattage	Cord Length (Ft.)	Carton Qty.	Carton Wt. (Lbs.)	
	I	AQUALUMIN III LIGH	TS – 250 WATT, 120 VOLT			
78864200	120	250	50	1	9	
78864250	120	250	100	1	13	
78864300	120	250	150	1	15	
	AQUALUMIN III LIGHTS – 100 WATT, 12 VOLT					
78873500	12	100	50	1	9	
78873700	12	100	100	1	11	
		MOUNTIN	NG BRACKETS			
78887700	Vinyl liner, 3/4 in. hub			1	2	
78887800	Vinyl liner, 1 in. hub			1	2	
619547	Mounting bracket for AquaLumin II and III			1	2	
	KWIK CHANGE LENS COVERS FOR AQUALUMIN LIGHTS					
78883700	78883700 AquaLumin II Lens Kit (red, green, blue)			1	1	
600140	AquaLumin III Lens Kit	(red, green, blue)		1	1	

### **Dimensions and Certifications**



Note: All 120 volt pool and spa lights must be connected to a branch circuit protected by a ground fault circuit interrupter (GFCI).

Note: All cord lengths over 50 feet on 12 volt lights create resistance that dramatically reduces the light output. This condition exists on all low voltage lights regardless of design or manufacturer.



# **AquaLuminator**®

# **Light and Water Return for Aboveground Pools**



### **Featured Highlights**

- · Light and return fitting
- · 25 ft. plug-in cord
- · Deluxe retail packaging
- Fits most aboveground pools
- AQL 500 for smaller pools
- · Pressure cleaner adapter
- Fountain attachment available
- Hard plumbing adapter

Our Hydro-Optic™ technology creates this revolutionary light and return fitting combination. This light fits the existing water return hole pre-punched by most aboveground pool manufacturers and can be installed on new or millions of existing pools. The AQL 500, with 33% fewer lumens than the standard AquaLuminator® offers quality entry-level lighting for smaller pools.



AquaLuminator Light and Water Return

### **Ordering Information**

Product	Description	Carton Qty.	Carton Wt. (Lbs.)				
ABOVEGROUND LIGHTS							
600030	AQL 500 aboveground light <sup>1</sup>	1	6				
600040	Quasar 500 non-return light 1	1	6				
98600000	AquaLuminator 2010 convertible	1	6				
98605300	Quasar non-return light	1	6				
98630000	AquaLuminator 2000, no transformer	1	1				
98600008	AquaLuminator, 240 volt	1	1				
	ACCESSORIES						
79100000	Fountain attachment, fits all AquaLuminator models	1	1				
79202900	Hard plumbing adapter	1	2				
79203100	Adapter to connect AquaLuminator to cleaner <sup>1</sup>	1	1				
619539	Non-return fitting	1	1				
619551	Color Lens Kit (Blue & Green)	1	2				

 $<sup>^{\</sup>rm 1}~$  AQL 500 and Quasar 500 do not support the fountain attachement or the pressure cleaner adapter.

### **Dimensions and Certifications**







Quasar™ Non-return Light for Aboveground Pools



Hard Plumbing Adapter



Pressure Cleaner Adapter



Fountain Attachment



AquaLuminator/Quasar

# **HiLite**®

### **Plastic Light for Swimming Pools and Spas**





HiLite Plastic Lights

The plastic HiLite® is the first light to be UL listed for installations in as little as 4 in. below the water surface. The shallow placement of these innovative lights on opposite pool ends will illuminate the entire swimming area, hiding plaster imperfections and eliminating hot spots in the pool.

### **Featured Highlights**

- UL listed for 4 in. depth below water
- All plastic housing and lens
- Easy placement, easy to install
- Perfect for lights on opposite pool ends
- · High intensity halogen quartz
- · Quarter-twist bulb access
- Molded clip for cord storage retention
- · Fits on any vertical wall
- · Soft, even light distribution
- 12 volt, 75 watt
- Simple two-wire connection

### **Ordering Information**


Product	Voltage	Wattage	Cord Length (Ft.)	Carton Qty.	Carton Wt. (Lbs.)
		HILITE – 75	WATT, 12 VOLT		
78780000	12	75	15	1	4
78780200	12	75	50	1	8
78782000	12	75	100	1	12
		FAC	E RINGS		
79210000	Plastic face ring, white			1	3
79210065	Plastic face ring, grey			1	3
79210011	Plastic face ring, black			1	3
LENS COVERS					
79105400	Lens kit (red and blue)			12	8

### **Dimensions and Certifications**





Note: All cord lengths over 50 feet on 12 volt lights create resistance that dramatically reduces the light output. This condition exists on all low voltage lights regardless of design or manufacturer.



# **SwimQuip**<sup>™</sup>**Lights**



### **Featured Highlights**

- Materials of Construction Utilizes a heavy copper shell
- High-impact Lens with many small prisms – Designed to reflect light rays throughout the pool, yet eliminates undue glare from above
- UL and CSA Listed For fresh water



SwimQuip™ Underwater Light

For Replacement Only: SwimQuip Niches have been discontinued.

### **Ordering Information**

Product	Description	Cord Length (Ft.)	Carton Wt. (Lbs.)			
SWIMQUIP UNDERWATER LIGHTS – 12 VOLT						
05082-0025	12 Volt Light, 300 Watt	25	13			
05082-0050	12 Volt Light, 300 Watt	50	18			
SWIMQUIP UNDERWATER LIGHTS – 120 VOLT						
05086-0025	120 Volt Light, 500 Watt	25	8			
05086-0050	120 Volt Light, 500 Watt	50	10			
05086-0100	120 Volt Light, 500 Watt	100	14			
05086-0150	120 Volt Light, 500 Watt	150	22			
05086-0250	120 Volt Light, 500 Watt	250	30			

### **Dimensions and Certifications**

Note: 12 volt, 300 watt lights and 120 volt, 500 watt lights are U.L. and C.U.L. Listed (fresh water only). Sta-Rite does not recommend installing 12V lights with cord lengths greater than 50 ft. A significant voltage drop occurs which dramatically reduces the light output. Each pool or spa light should be installed with its own ground fault circuit interrupter (GFCI). UL has listed Swimquip lights for use with Swimquip niches. To ensure proper grounding/bonding connections, install only Swimquip in Swimquip niches.





# **SunLite® Brass LTC Lights**





SunLite - Brass LTC Stainless Steel Quartz Halogen

For Replacement Only: SunLite Niches have been discontinued.

### **Ordering Information**

Product	Voltage	Wattage	Cord Length (Ft.)	Carton Wt. (Lbs.)			
SUNLITE - BRASS LTC STAINLESS STEEL QUARTZ HALOGEN							
05603-2030	12	75	30	4.55			
05603-2050	12	75	50	4.55			
05603-2100	12	75	100	11			
05605-2030	120	100	30	4			
05605-2050	120	100	50	4			
05605-2100	120	100	100	5			
05607-2250	120	250	250	5			
05607-2030	120	250	30	5			
05607-2050	120	250	50	6			
05607-2100	120	250	100	13			
05605-2250	120	100	250	4			
	N	NICHES AND ACCESSORI	ES				
05601-0111	Snap-on Color Lens Kit, Plast	ic (Blue, Red)		1			
34627-6008	Blue - Small Popover Lens			.5			
34627-6009	Red - Small Popover Lens			.5			
05601-0111	Red/Blue - Small Popover Lei	ns Kit		.5			

### **Dimensions and Certifications**






Note: Sta-Rite does not recommend installing 12V lights with cord lengths greater than 50 ft. A significant voltage drop occurs which dramatically reduces the light output.

Note: Each pool or spa light should be installed with its own ground fault circuit interrupter (GFCI). Note: UL has listed Sta-Rite lights for use with Pentair niches. To ensure proper grounding/bonding connections, install Sta-Rite lights only in Pentair niches.

Note: Cord lengths over 100 ft. are for light replacement only. Use of long cord lengths is not recommended for new installations.

Note: CSA does not approve plastic niches. 1/2 in. niches will not work in Canada.



# **FIBERworks**®

### **AmerGlow™ Fiber Optic Cable**



### **Featured Highlights**

- · Wide-angle lens included in all assemblies
- Dense cable for installations in one inch conduit. Dense cable jacket for one inch or smaller conduit.
- Factory pre-cut, pre-OptiFused cable for convenience and superior light transmission. Requires the separate purchase of a gunite, vinyl or fiberglass "lens housing only."
- Highest quality fiber termination system available, for superior light transmission



AmerGlow - Fiber Optic Cable

AmerFlow™ 325, 225 and 170 – Single or twin lights in the pool end – AmerGlow™ 325 fiber cable for single light installations that demand the brightest cable in the industry for the most demanding installations with a single conduit. AmerGlow™ 325, 225 or 170 Single or twin lights in pool end – These super capacity fiber optic cables are used in the end wall to illuminate the entire pool. They can be fed through 1 or 1-1/2 inch rigid conduit.

AmerGlow™ 100, 70s – *Multiple Lights in Pool Sides* – The AmerGlow 100 and AmerGlow 70 can be used for multiple lights on the side of the pool.

AmerGlow™ 100, 70, 50 and 30 – Spa Installations – AmerGlow™ 30 fiber optic cable delivers superior light for most spas. AmerGlow 100, 70 or 50 may be used for extra large spas, spas with glass block dam wall, or long cable runs.

**AmerGlow 100, 70, 50, 30 and 12 – Shadow Illumination, Step and Landscape Light** – AmerGlow 30 is perfect for steps, small shadows or basic landscape illumination. AmerGlow 50 is used for more demanding requirements including waterfalls, fountains and longer runs. AmerGlow 100 and 70 can be used for washing large shadows, longer runs, or for more intense lighting.

### **Ordering Information**

Product	Description	Carton Qty.	Carton Wt. (Lbs.)				
	AMERGLOW 325 FIBER CABLE (YELLOW)						
840075 1	13 ft. kit, with Wide-angle lens	1	3				
840077 1	20 ft. kit, with Wide-angle lens	1	4				
840078 <sup>2</sup>	50 ft. roll	1	12				
840079 <sup>2</sup>	125 ft. roll	1	19				
840080 <sup>2</sup>	250 ft. roll	1	38				
840106 <sup>1</sup>	25 ft. kit, with Wide-angle lens	1	4				
	AMERGLOW 225 FIBER	CABLE (PURPLE)					
20211400 <sup>1</sup>	13 ft. kit, with Wide-angle lens	1	4				
20211800 <sup>1</sup>	20 ft. kit, with Wide-angle lens	1	4.5				
21001300 <sup>2</sup>	50 ft. roll	1	9				
21001301 <sup>2</sup>	125 ft. roll	1	23				
21001400 <sup>2</sup>	250 ft. roll	1	46				
	AMERGLOW 170 FIBE	R CABLE (GREEN)					
20210300 1	11 ft. kit, with Wide-angle lens	1	3				
20210500 1	14 ft. kit, with Wide-angle lens	1	3				
20210700 1	17 ft. kit, with Wide-angle lens	1	3				
20210900 1	20 ft. kit, with Wide-angle lens	1	4				
21001000 <sup>2</sup>	50 ft. roll	1	12				
21001001 <sup>2</sup>	125 ft. roll	1	19				
21001100 <sup>2</sup>	250 ft. roll	1	38				

# **FIBERworks**®

# AmerGlow<sup>™</sup> Fiber Optic Cable

# **Ordering Information**

Product	Description	Carton Qty.	Carton Wt. (Lbs.)
	AMERGLOW 100 FIBER C	OPTIC CABLE (BLUE)	
840099 <sup>2</sup>	50 ft. roll	1	11
840100 <sup>2</sup>	125 ft. roll	1	14
840101 <sup>2</sup>	250 ft. roll	1	25
840103 <sup>1</sup>	16 ft. kit, with Wide-angle lens	1	2
840105 <sup>1</sup>	25 ft. kit, with Wide-angle lens	1	4
840146 ¹	40 ft. kit, with Wide-angle lens	1	5
	AMERGLOW 70 FIBER OP	TIC CABLE (ORANGE)	
20215400 1	18 ft. kit, with Wide-angle lens	1	2
20215600 1	25 ft. kit, with Wide-angle lens	1	2
20216000 1	40 ft. kit, with Wide-angle lens	1	3
21001500 <sup>2</sup>	50 ft. roll	1	4
21002000 <sup>2</sup>	125 ft. roll	1	4
21002100 <sup>2</sup>	250 ft. roll	1	13
21002200 <sup>2</sup>	500 ft. roll	1	25
	AMERGLOW 50 FIBER OP	TIC CABLE (BROWN)	
840151 1	14 ft. kit, with Wide-angle lens	1	2
840152 <sup>1</sup>	25 ft. kit, with Wide-angle lens	1	3
840153 <sup>1</sup>	40 ft. kit, with Wide-angle lens	1	4
840154 <sup>2</sup>	50 ft. roll	1	4
840155 <sup>2</sup>	125 ft. roll	1	10
840156 <sup>2</sup>	250 ft. roll	1	16
840157 <sup>2</sup>	500 ft. roll	1	27
	AMERGLOW 30 FIBER OF	PTIC CABLE (GREY) 2	
21002400	50 ft. roll	1	4
21002500	125 ft. roll	1	11
21002600	250 ft. roll	1	14
840081	500 ft. roll	1	25

 $<sup>^{\</sup>scriptscriptstyle 1}$  Lens housing for gunite, invisible gunite, vinyl or fiberglass purchased separately.

 $<sup>^{\,2}\,\,</sup>$  Lens assembly complete for gunite, invisible gunite, vinyl or fiberglass purchased separately.

# **FIBERworks**®

### OptiFusion™ Lenses & Cable Termination System



### **Featured Highlights**

- Wide-angle lens included in all assemblies
- Highest transmission underwater lenses available
- · Invisible gunite lens assembly
- Exclusive "lens-before-liner" vinyl lens assembly
- Also in standard gunite or fiberglass
- Lens assembly is sealed even with wet conduit
- Able to install underwater
- · Exclusive OptiFusion gel
- · 80 watt professional Fiber-Knife



**OptiFusion Termination System** 

**OptiFusion Lenses** – Superior optic and light engineering delivers the most advanced, highest transmission underwater lenses available. FIBERworks® "invisible" gunite lens assembly eliminates the conspicuous white flange and fits over 1 inch PVC conduit or inside 1-1/2 in. PVC conduit. The exclusive "lens before liner" vinyl pool assembly allows you to install cable and lens before you install the liner. All lenses are sealed even with wet conduit and can be installed underwater.

**Wide-angle Lens** – Advanced optical engineering design has delivered FIBERworks Wide-angle lens. This lens greatly increases the spread of light in a pool or spa and is great for those hard to reach areas. The Wide-angle lens retrofits to all existing FIBERworks lens bodies in a matter of seconds. All complete lens assemblies and lens sub-assembly kits include the Wide-angle and standard lens.

The Professional Fiber Optic Termination System – Combines OptiFusion lens technology with a quick, simple, 3-step (no-epoxy) fiber termination procedure for unparalleled light transmission. The kit contains all required special tools including professional FiberKnife™specialty tool, cable stripper, cutting shield, lens tool, and OptiFusion Gel. Components and replenishments may be purchased separately.

### **Ordering Information**

Product	Description	Carton Qty.	Carton Wt. (Lbs.)
	COMPLETE LENS ASSEMBLY		
22000100	Gunite invisible, 1 in. socket or fits inside 1-1/2 in. pipe	1	0.325
22000200	Gunite standard, white, 1-1/2 in. socket	1	0.38
22000400	Vinyl pool, white, 1-1/2 in. FIPT	1	0.625
22000500	Fiberglass pool/spa, white, 1-1/2 in. socket	1	0.5
	LENS SUBASSEMBLY		
840070	Wide-angle lens	1	1
22102000	Complete assembly, without housing	1	0.325
22103000	Standard lens	1	1
	LENS HOUSING ONLY		
22000800	Gunite invisible, 1 in. socket or fits inside 1-1/2 in. pipe	1	0.25
22000900	Gunite standard, white, 1-1/2 in. socket	1	0.25
22001000	Vinyl pool, white, 1-1/2 in. FIPT	1	0.625
22001100	Fiberglass pool / spa, white, 1-1/2 in. socket	1	0.325
	OPTIFUSION FIBER OPTIC TERMINATION	ON SYSTEM	
840158	Spline Tool for installing UltraGlow Cable	1	0.5
21005500	Professional Fiber Termination Kit 1	1	0.1
21005600	FiberKnife blade replacement pack, set of 3	3	0.1
21005900	OptiFusion Gel - Convenience tube for 12 lenses	1	0.1
21006000	Professional 80 watt FiberKnife with 3 blades	1	0.325
21006100	Steel fiber cutting shield	1	0.1
21006200	AmerGlow cable stripping tool	1	0.25
21006500	Lens tightening tool	1	0.1

<sup>1</sup> Includes: FiberKnife, convenience tube of OptiFusion Gel, AmerGlow cable stripping tool, steel fiber cutting shield, and lens tightening tool.



22000800




22000900



22001000



22001100




22102000

# **FIBERworks**<sup>®</sup>

### **UltraGlow**<sup>™</sup> **Perimeter Fiber Optic Cable**





UltraGlow Perimeter Fiber Optic Cable

### **Featured Highlights**

### **Ultra Glow**

- Available in 25, 50 or 75 fibers
- UltraGlow 50, 100% brighter than 25 fibers; UltraGlow 75 triple the brilliance of 25 fibers

### **FW Glow**

- Circular perimeter cable available in 25 or 50 fibers
- Easily installs inside Cinderella or Ft. Wayne coping

### C-Track

- Cleaner design for professional gunite and fiberglass installs.
   Available in clear or white PVC.
- Rigid PVC, can be formed for radius. Stainless steel screws and anchors included.

### L-Track

- · Easier renovation for vinyl pools
- Rigid PVC, can be formed for radius and can be used with coping forms

### **Other Tracks**

- Stegmeier, Cardinal Systems coping, Pacific coping, Fox coping, Pleasure Way coping, Modern Pool Systems coping, Arbor, Cinderella, Quaker, Mortex
- Using a spline tool when installing UltraGlow perimeter cable can save you hours on installation

**UltraGlow™ 25, 50 and 75 – Perimeter Fiber Optic Cable** – UltraGlow™ is translucent, side illuminating fiber optic cable designed to install under the coping of your pool or spa. Its exclusive design promotes superior performance and ease of installation. UltraGlow 25, 50 and 75 installs in a variety of simple, professional patented track systems, for concrete, vinyl or fiberglass. Fiber Optic Track is also available in concrete coping forms and vinyl liner aluminum coping from the manufacturer's listed below. (When appropriate be sure to specify FW cable.)

### **Ordering Information**

Product	Description	Carton Wt. (Lbs.)
	FW GLOW 50	
840089	FW Glow 50-125 ft.	22
840090	FW Glow 50-150 ft.	24
840091	FW Glow 50-200 ft.	33
840092	FW Glow 50-500 ft.	58
	FW GLOW 25	
840087	FW Glow 25-125 ft.	22
840048	FW Glow 25-150 ft.	24
840049	FW Glow 25-200 ft.	33
840018	FW Glow 25-500 ft.	58
840019	FW Glow 25-1,000 ft.	58
C-TRACK FO	OR CONCRETE OR FIBERGL	ASS POOLS
21004200	104 ft., 8 ft. x 13 pcs. track, white PVC	8
21004800	104 ft., 8 ft. x 13 pcs. track, clear PVC	8
21007200	Tube of RTV silicone adhesive <sup>1</sup>	1
840071	Track screw and anchor set (qty. 40)	1
L-TRACK	FOR VINYL POOLS & ACCE	SSORIES
840158	Spline Tool for installing UltraGlow Cable	0.5
21005100	104 ft., Rigid L-track, 8 ft. x 13 pcs., white	8
23501900	Step entry fitting <sup>3</sup>	0.175

Product	Description	Carton Wt. (Lbs.)
	ULTRAGLOW 75	
840094	UltraGlow 75–125 ft.	22
840095	UltraGlow 75–150 ft.	24
840096	UltraGlow 75–200 ft.	33
840097	UltraGlow 75–500 ft.	58
	ULTRAGLOW 50	
21007500	UltraGlow 50–125 ft.	22
21007600	UltraGlow 50–150 ft.	24
21007700	UltraGlow 50–200 ft.	33
21007800	UltraGlow 50–500 ft.	58
21007900	UltraGlow 50–1000 ft.	130
	ULTRAGLOW 25	
21003500	UltraGlow 25–125 ft.	12
21003600	UltraGlow 25–150 ft.	13
21003700	UltraGlow 25–200 ft.	18
21003800	UltraGlow 25–500 ft.	30
21003900	UltraGlow 25 –1000 ft.	68

- <sup>1</sup> 3 tubes required per 104 ft. of track.
- <sup>2</sup> Kit includes: 24 ft. white C-track, 1 tube silicone adhesive and step entry fitting.
- <sup>3</sup> For use with all UltraGlow perimeter cable.

# **Fountain Lights and Fixtures**

### For use in Fountains and Ponds



### Featured Highlights

### **Fountain Fixtures**

- Sturdy cast bronze construction with attractive natural bronze finish
- Base and yoke-mount rotate 360° and pivot 180°
- Integrated bonding lug for electrical safety
- Exclusive strain-relief prevents damage to wiring connections
- · Niche installation option available
- Large fixture for use with the IntelliBrite® 5g Pool Light for water fountains, Amerlite® and AmerQuartz® lights listed for fountain use
- Small fixture for use with IntelliBrite® 5g Spa Light, AquaLight®, and SpaBrite® lights listed for fountain use
- · For use with Pentair fountain fixtures and niche kits
- Same functionality and color cycles as the standard IntelliBrite® 5g for swimming pools
- Selectable beam pattern lens for standard and wide beam angle options

Fountain Fixture for Large Lights





Fountain Fixture for Small Lights







Fountain Rock Guard for Large Niches

**Pentair Fountain Fixtures** are the only fixtures that offer true color lighting capabilities, as well as traditional white lighting. When combined with Pentair's IntelliBrite 5g color lights, these systems can bathe fountains in a constantly changing spectrum of color. Both large and small fixtures are designed for easy installation and for use with Pentair Pool Products lights only.


### **Ordering Information**

Product	Description	Carton Qty.	Carton Wt. (Lbs.)
	INTELLIBRITE 5g LED POOL LIGHT FOR	WATER FOUNTAINS	
601000	IntelliBrite 5g – 120 volt, 30 ft. cord	1	
601001	IntelliBrite 5g – 120 volt, 50 ft. cord	1	
	INTELLIBRITE COLOR LED SPA LIGHT FOR	WATER FOUNTAINS	
640050	IntelliBrite Color Spa – 120 volt, 30 ft. cord	1	
640051	IntelliBrite Color Spa – 120 volt, 50 ft. cord	1	
	FOUNTAIN FIXTURES	;	
560000	Fountain fixture for large lights with rock guard $^{\rm 1}$	1	15
560001	Fountain fixture for small lights with rock guard $^{\rm 1}$	1	9
	FOUNTAIN ROCK GUAR	DS	
560002	Fountain rock guard for large niches <sup>2</sup>	1	7
560003	Fountain rock guard for small niches <sup>2</sup>	1	4

<sup>&</sup>lt;sup>1</sup> Light is sold separately.


# 12.00° DIA

Fountain Fixture for Large Lights




Fountain Fixture for Small Lights

### **Dimensions and Certifications**





Fountain Rock Guard for Large Niches



Fountain Rock Guard for Small Niches

Note: Underwriters Laboratories has listed Pentair Pool Products lights for use with Pentair Pool Products, American Products, Purex, or PacFab niches only. To ensure proper grounding/bonding connections install only Pentair Pool Products lights in Pentair Pool Products, American Products, Purex, or PacFab niches.

See page 452 for SAm light replacement parts.

See page 461 for Fountain Fixture replacement parts.

<sup>&</sup>lt;sup>2</sup> Light and niche sold separately.

# **Canadian Pool Lights**

# **Canadian Pool Lights**



### **Ordering Information**

Product	Description	Voltage	Wattage	Cord Length	Carton Qty.	Carton Wt. (Lbs.)
	CANADIAN INTELLIBRITE COLOR POOL LIGHTS					
602010	12V IntelliBrite Color Pool 30 ft.	12		30	1	
602012	12V IntelliBrite Color Pool 100 ft.	12		100	1	
602000	120V IntelliBrite Color Pool 30 ft.	120		30	1	
602002	120V IntelliBrite Color Pool 100 ft.	120		100	1	
		CANADIAN INTELLIBRI	TE COLOR SPA LIG	HTS		

### For all CSA listed color spa lights, please refer to page 100.

CANADIAN INTELLIBRITE WHITE POOL LIGHTS

For all CSA listed white pool lights, please refer to page 101.

**CANADIAN INTELLIBRITE WHITE SPA LIGHTS** 

For all CSA listed white spa lights, please refer to page 102.

			TAINLESS STEEL FACE RING				
78453102	AmerLite Light	120	500	30	4	11	
	SPABRITE <sup>®</sup> WITH STAINLESS STEEL FACE RING						
78106002	SpaBrite Light	120	60W (100W Equiv.)	30	12	9	
78103202	SpaBrite Light	12	100W Equivalency	30	12	9	
		AQUALI	GHT <sup>*</sup> (Page 108)				
77113102	AquaLight	120	100	30	12	9	
77163102	AquaLight	120	250	30	12	9	
		AQUA	ALUMINATOR*				
600042	Quasar 500 CSA				8	6	
98610002	AquaLuminator 2000				8	6	
98610042	AquaLuminator 2000 w/Fountain - CSA				8	6	
	LARGE STAINLESS STEEL NICHE FOR CONCRETE INSTALLATION (Page 123)						
78210701	3/4 in. rear hub				1	0.25	
	LARGE STAINLESS STEEL N	ICHE FOR VI	NYL AND FIBERGLASS INST	TALLATION (Pa	ige 123)		
78232401	3/4 in. rear hub				12	3	
	SMALL STAINLESS S	TEEL NICHE F	OR CONCRETE INSTALLAT	ION (Page 124	1)		
78244202	3/4 in. rear hub				12	3	
	SMALL STAINLESS STEEL N	IICHE FOR M	ANUFACTURED POOLS, SP	AS & TUBS (Pa	ge 124)		
78241202	3/4 in. top hub				12	2	
78242202	3/4 in. rear hub				12	2	
	NICHE CONCRETE SHIELD						
45361500	Niche shield for SpaBrite/AquaLight Niche				1	0.25	
45361000	Niche shield, concrete/plaster for AmerLite				1	0.25	
		AC	CESSORIES				
619962	100W Transformer 12V-14V				1	10	
619963	300W Transformer 12V-14V				1	11	

### **Dimensions and Certifications**







Note: All 120 volt pool and spa lights must be connected to a branch circuit protected by a ground fault circuit interrupter (GFCI).

# **Pentair Large Stainless Steel Niches**


### **Niches for Swimming Pools and Spas**



### **Featured Highlights**

- · Niches for all installations
- · Stainless steel housing
- Brass hub: 1/2, 3/4, or 1 in.
- Internal/external bonding lugs
- Vinyl niches with chrome/brass sealing rings
- · Sandwich gasket for vinyl
- Powder coated sealing ring (optional)


Large stainless steel niches are formed with brass fittings. All niches have internal and external grounding lugs for use with either metal or PVC conduit.



Pentair Large Niches

### **Ordering Information**

Product	Description	Carton Qty.	Carton Wt. (Lbs.)			
	LARGE STAINLESS STEEL NICHES FO	OR CONCRETE INSTALLATION				
78210200	1/2 in. top hub	12	3			
78210300	1/2 in. rear hub	12	3			
78210400	3/4 in. top hub	12	3			
78210500	1 in. top hub	12	3			
78210600	1 in. rear hub	12	3			
78210700	3/4 in. rear hub	12	3			
	VINYL AND FIBERGLASS INSTALLATION, STANDARD 10 HOLE PATTERN					
78232400	Fiberglass/liner, 3/4 in. rear hub	12	5			
78232500	Fiberglass/liner, 1 in. rear hub	12	5			
	LARGE STAINLESS STEEL NIC	HE, CONCRETE SHIELD				
45361000	Niche Shield for construction	1	0.325			
79211600	Replacement/Repair Niche plaster ring	1	5			
	POWDER COATED SEALING RIN	NGS, VINYL/FIBERGLASS				
79200255	Sealing ring, large niche	1	0.01			
	SCOTCHCAST SEALANT FOR NICHE BONDING LUGS					
60028300	Scotchcast™ 2135 Sealant	1	0.0375			



### **Dimensions and Certifications**





# **Pentair Small Stainless Steel Niches**

### **Niches for Swimming Pools and Spas**





Pentair Small Niches

Small stainless steel niches are formed with brass fittings. All niches have internal and external bonding lugs and can be used with either metal or PVC conduit.

### **Featured Highlights**

- · Stainless steel housing
- Brass hub: 1/2, 3/4, 1 in.
- Internal/external bonding lugs
- · Vinyl niches with chrome/brass sealing rings
- · Niches for all installations
- Sandwich gasket for vinyl


### **Ordering Information**


Product	Description	Carton Qty.	Carton Wt. (Lbs.)		
SMALL STAINLESS STEEL NICHES FOR CONCRETE INSTALLATION					
78244100	Concrete pools or spas, 1/2 in. rear hub	12	2		
78244200	Concrete pools or spas, 3/4 in. rear hub	12	2		
78244300	Concrete pools or spas, 1 in. rear hub	12	2		
78243100	Concrete pools or spas, 1/2 in. top hub	12	2		
78243200	Concrete pools or spas, 3/4 in. top hub	12	2		
78243300	Concrete pools or spas, 1 in. top hub	12	2		
MANUFACTURED POOLS, SPAS & TUBS INSTALLATION					
78242200	Manufactured pools, spas & tubs, 3/4 in. rear hub	12	3		
78242300	Manufactured pools, spas & tubs, 1 in. rear hub	12	3		
SMALL STAINLESS STEEL NICHE SHIELD					
45361500	Niche shield for SpaBrite/AquaLight Niche	1	0.25		
	VINYL/FIBERGLASS NICHE SEALING RING, PO	WDER-COATED			
79206055	Sealing ring, small niche	1	0.01		
SCOTCHCAST SEALANT FOR NICHE BONDING LUGS					
60028300	Scotchcast™ 2135 Sealant	1	0.325		


### **Dimensions and Certifications**











# **Plastic Niches**

### **Plastic Niches for Swimming Pools and Spas**

### Featured Highlights

### **Gunite Plastic Niches:**

- Exclusive cord seal grommet (Accessory sold separately)
- · Large and small models
- · Rebar tie-backs
- · Plaster ring for secure sealing
- · Internal/external bonding lugs
- · High strength PVC construction
- · Rear one inch PVC hub
- Includes 45° and 3/4 in. reducer bushings
- · Includes gunite/plaster shield

### QuickNiche:

- · Revolutionary design mounts and seals like a vinyl inlet fitting
- No screws directly through the pool wall as with conventional vinyl niches
- Designed for quick and easy, one-person installation
- Rubber gasket overmolded on seal ring for superior sealing
- Built-in current-collecting ring for maximum safety
- · Zero wall panel exposure
- · Fits standard niche panel
- UL listed



**Gunite Plastic Niches** – These plastic concrete niches are molded of high strength. corrosion resistant PVC with a one inch PVC hub. Both 450 and 3/4 in. reducer bushings are included. Gunite models feature rebar tie-backs and a plaster ring for clean, simple installations and all are packed with a gunite/plaster shield.



**Pentair Water** 

QuickNiche™ – One look at the QuickNiche is all it takes to see that this is a product that really lives up to its name. It is an easy-to-install, super-sealing light niche for vinyl liner pools. It features a revolutionary lockring design that mounts and seals like a vinyl inlet fitting fast, secure, and totally leak proof.

### **Ordering Information**

Product	Description	Carton Qty.	Carton Wt. (Lbs.)			
PLASTIC NICHE - CONCRETE						
79206600	Small PVC niche, concrete	12	2			
79206700	Large PVC niche, concrete	8	3			
PLASTIC NICHE - VINYL						
620004	QuickNiche <sup>1</sup>	1	1			
630043	QuickNiche blue seal ring	1	1			
630044	QuickNiche grey seal ring	1	1			
ACCESSORIES						
670044	Cord Seal Grommet Kit, (Qty. 3)	3	1			

<sup>&</sup>lt;sup>1</sup> Cord seal grommet not available for Quick Niche.

# 7 55 12 229 13.015 9.96

### **Dimensions and Certifications**







**Exclusive cord seal grommet accessory** (p/n 670044)

# **Light Accessories and Junction Boxes**

# Add-on Features and Accessories for all Pentair Lights





Add-on Light Features and Accessories

Our optional light and niche features are designed to enhance our standard products and accommodate your specific project requirements.

### **Featured Highlights**

### **Kwik-Change Lens Covers**

- Powder coated vinyl niche sealing ring
- Snap-on plastic face rings available for s/s lights
- **J-Boxes** Protected by U.S. Patent Pending
- Available in 3 sizes: 1/2, 3/4 & 1 in.
- Polycarbonate cover with brass base
- Built-in strain relief
- UL listed

### **Ordering Information**

Product	Description	Carton Qty.	Carton Wt. (Lbs.)
	KWIK-CHANGE LENS COVE	ERS	
650015	SpaBrite/AquaLight lens, magenta	1	0.5
650016	SpaBrite/AquaLight lens, purple	1	0.5
650017	SpaBrite/AquaLight lens, teal	1	0.5
650018	SpaBrite/AquaLight lens, green	1	0.5
650019	SpaBrite/AquaLight lens, 6 assorted colors	1	0.5
78883700	AquaLumin (3 assorted colors)	1	0.8
78883701	AquaLumin lens, blue	1	0.5
78883702	AquaLumin lens, red	1	0.5
78883703	AquaLumin lens, green	1	0.5
78900100	Amerlite/AmerQuartz lens (3 colors - red, green, blue)	12	2
78900700	Amerlite/AmerQuartz lens, green	1	0.5
78900800	Amerlite/AmerQuartz lens, blue	1	0.5
78900900	Amerlite/AmerQuartz lens, red	1	0.5
79108900	SpaBrite/AquaLight lens, red	1	0.5
79109000	SpaBrite/AquaLight lens, blue	1	0.5

Product	Description	Carton Qty.	Carton Wt. (Lbs.)			
:	SNAP-ON PLASTIC FACE RINGS FOR AMERLITE					
79212111	Black	1	0.01			
79212100	White	1	0.01			
79212165	Grey	1	0.01			
79213111	Black	24	0.01			
79213100	White	24	0.01			
SNAP-ON PLASTIC FACE RINGS FOR SPABRITE/AQUALIGHT						
79212200	White	1	0.01			
79212211	Black	1	0.06			
79212265	Grey	1	0.06			
VINYL NICHE SEALING RING, WHITE POWDER-COATED						
79200255	Sealing ring, large niche	1	0.01			
79206055	Sealing ring, small niche	1	0.01			
JUNCTION BOX BRASS BASE W/POLYCARBONATE COVER 1						
78310500	(3) - 1/2 in. ports	12	1			
78310600	(3) - 3/4 in. ports	12	1			
78310700	3/4 in. x 1 in. x 3/4 in. ports	12	1			

<sup>&</sup>lt;sup>1</sup> UL Listed.

### **Dimensions and Certifications**



